


TECHNICAL DATA SHEET

SR502

Ethoxylated (9) Trimethylolpropane Triacrylate

DESCRIPTION

SR502 is a low skin irritation, fast curing monomer for use in free radical polymerization.

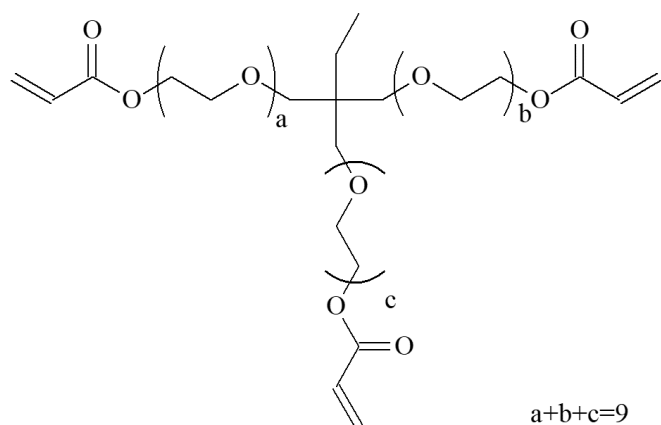

SHELF LIFE

Store in the original, closed container in a dry, cool (<45°C) and well-ventilated place. Keep away from frost and heat (open flames, hot surfaces and sources of ignition) sources. Typical shelf-life is 6 months from delivery date for unopened containers. In cases where product sampling is required to carry out incoming quality tests, shelf-life should be maintained beyond opening, provided that it is tightly closed immediately after and that contamination with foreign bodies is avoided. Inhibitors have been added to enhance storage stability. They require the presence of air in the container in order to improve their efficiency. Keep stabilizer levels constant to avoid explosive polymerization. An air space is required above the liquid in all containers

STORAGE

See SDS for Storage Considerations

HEALTH AND SAFETY

See SDS for Health & Safety Considerations

LIQUID PROPERTIES

Appearance	Clear liquid
Functionality	3
Color (Pt/Co or APHA)	<250
Viscosity at 25°C (mPa.s or cPs)	130
Density at 25°C (g/mL)	1.1133
Molecular Weight (g/mol)	693
Refractive Index at 25°C	1.4692
Surface Tension at 20°C (mN/m)	40

CURED PROPERTIES

Tg (°C), by DSC	-19
-----------------	-----

PRODUCT PERFORMANCE

Pigment Wetting	
Shrinkage	
Flexibility	

SUGGESTED APPLICATIONS

Adhesives & sealants
 Electronics
 Flexographic inks
 Inkjet inks
 Metal coatings
 Offset inks
 Overprint varnishes
 Screen inks
 Wood coatings

Arkema Inc
 502 Thomas Jones Way
 Exton, PA 19341 – AMERICA
www.Sartomer.arkema.com

Arkema France
 420, rue d'Estienne d'Orves
 92705 Colombes Cedex
 France
www.Sartomer.arkema.com