


TECHNICAL DATA SHEET

SR561

Alkoxyated Hexanediol Diacrylate

DESCRIPTION

SR561 offers reduced skin irritation, excellent flexibility, and improved compatibility with epoxy and urethane-based coating systems.

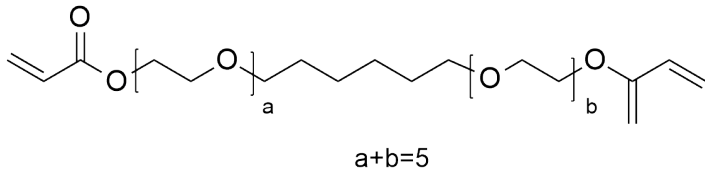

LIQUID PROPERTIES

Appearance	Clear liquid
Functionality	2
Color (Pt/Co or APHA)	<200
Viscosity at 25°C (mPa.s or cPs)	45
Density at 25°C (g/mL)	1.0731
Molecular Weight (g/mol)	446
Refractive Index at 25°C	1.4634
Surface Tension at 20°C (mN/m)	37

CURED PROPERTIES

Tg (°C), by DSC	-38
-----------------	-----

PRODUCT PERFORMANCE

Flexibility
Wood Adhesion
Metal Adhesion
Shrinkage
Pigment Wetting
Weatherability
Moisture Resistance
Corrosion Resistance

SUGGESTED APPLICATIONS

Flexographic inks
Inkjet inks
Offset inks
Screen inks

SHELF LIFE

Store in the original, closed container in a dry, cool (<45°C) and well-ventilated place. Keep away from frost and heat (open flames, hot surfaces and sources of ignition) sources. Typical shelf-life is 6 months from delivery date for unopened containers. In cases where product sampling is required to carry out incoming quality tests, shelf-life should be maintained beyond opening, provided that it is tightly closed immediately after and that contamination with foreign bodies is avoided. Inhibitors have been added to enhance storage stability. They require the presence of air in the container in order to improve their efficiency. Keep stabilizer levels constant to avoid explosive polymerization. An air space is required above the liquid in all containers

STORAGE

See SDS for Storage Considerations

HEALTH AND SAFETY

See SDS for Health & Safety Considerations

Arkema Inc
502 Thomas Jones Way
Exton, PA 19341 – AMERICA
www.Sartomer.arkema.com

Arkema France
420, rue d'Estienne d'Orves
92705 Colombes Cedex
France
www.Sartomer.arkema.com