


TECHNICAL DATA SHEET

SpeedCure 2959


1-[4-(2-hydroxyethoxy)-phenyl]-2-hydroxy-2-methylpropan-1-one

DESCRIPTION

SpeedCure 2959 is a water dispersible Norrish Type I photoinitiator from the hydroxyacetophenone family, with absorption maxima at 219 and 275 nm. SpeedCure 2959 provides low yellowing and surface cure when used at 0.5-5lwt% in UV curable formulations.

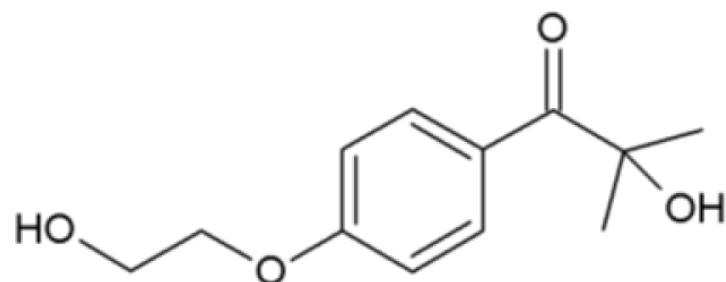

UV SPECTRUM

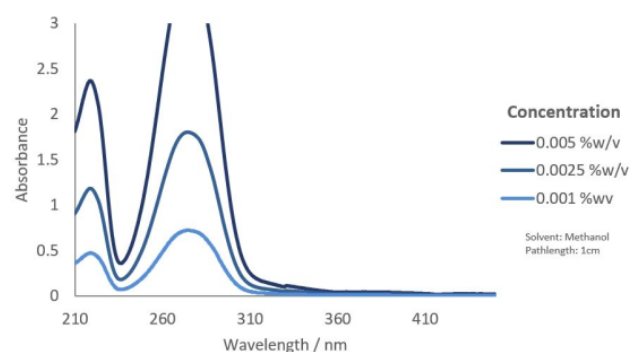

SHELF LIFE

Typical shelf-life is **24** months from the manufacture date for un-opened containers. In cases where product sampling is required to carry out incoming quality tests, shelf-life should be maintained beyond opening, provided that it is tightly closed immediately after and that contamination with foreign bodies is avoided.

STORAGE AND HANDLING

Store in the dark in the original, closed container, in a dry, cool (20-°C) and well-ventilated place.
Keep away from frost and heat (open flames, hot surfaces and sources of ignition) sources.

HEALTH AND SAFETY

See SDS for Health & Safety Considerations

SALES SPECIFICATIONS

Appearance	White to off-white solid
Purity (%)	≥ 98.0
Melting Range (°C)	86.0 - 90.0
Loss on Drying (%)	≤ 0.5

PERFORMANCE

Clear Coatings
Low Odor
Low Yellowing
Pigmented Systems
Surface Cure

SUGGESTED APPLICATIONS

Adhesives & sealants
Flexographic inks
Industrial coatings
Offset inks
Overprint varnishes
Screen inks
Wood coatings

Headquarters: Arkema France
51, Esplanade du Général de Gaulle
92800 Puteaux – France
T +33 (0)1 49 00 80 80
www.Sartomer.arkema.com