


TECHNICAL DATA SHEET

SpeedCure 7010-L

A solution of Polymeric thioxanthone in 2-[2,2-bis(2-prop-2-enoyloxyethoxymethyl) butoxy]ethyl prop-2-enoate

DESCRIPTION

SpeedCure 7010-L is a 40% active liquid polymeric Norrish Type II photoinitiator of the polymeric thioxanthone family. SpeedCure 7010-L provides long wavelength sensitisation of appropriate photoinitiators, depth cure, low odour and low migration when used at 0.1-10 wt% and combined with an amine synergist in UV and LED curable formulations.

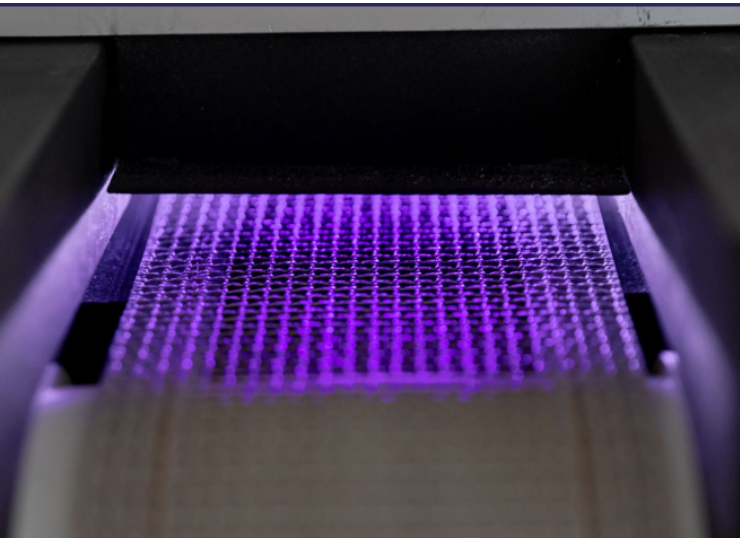

SHELF LIFE

Typical shelf-life is **24** months from the manufacture date for un-opened containers. In cases where product sampling is required to carry out incoming quality tests, shelf-life should be maintained beyond opening, provided that it is tightly closed immediately after and that contamination with foreign bodies is avoided.


STORAGE AND HANDLING

Store in the dark in the original, closed container, in a dry, cool (20-°C) and well-ventilated place.
Keep away from frost and heat (open flames, hot surfaces and sources of ignition) sources.
May crystallise during storage at ambient temperature. Warm to 35-40°C and mix thoroughly prior to use.

HEALTH AND SAFETY

See SDS for Health & Safety Considerations

UV SPECTRUM

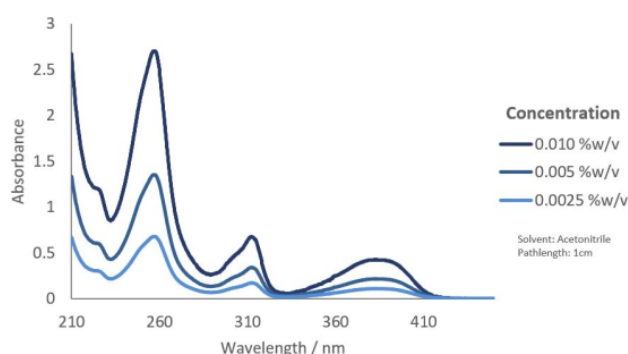

SALES SPECIFICATIONS

Appearance	Pale yellow liquid
Total Active Content (%)	38.0 - 42.0

PERFORMANCE

Depth Cure
LED
Low Odor
Pigmented Systems

SUGGESTED APPLICATIONS

Flexographic inks
Industrial coatings
Inkjet inks
Offset inks
Screen inks

Headquarters: Arkema France
51, Esplanade du Général de Gaulle
92800 Puteaux – France
T +33 (0)1 49 00 80 80
www.Sartomer.arkema.com