


TECHNICAL DATA SHEET

SpeedCure BKL


2,2-dimethoxy-1,2-phenylacetophenone

DESCRIPTION

SpeedCure BKL is a Norrish Type I photoinitiator from the acetophenone family, with an absorption maximum at 253 nm. SpeedCure BKL provides high reactivity and surface cure when used at 0.5-5wt% in UV curable formulations.

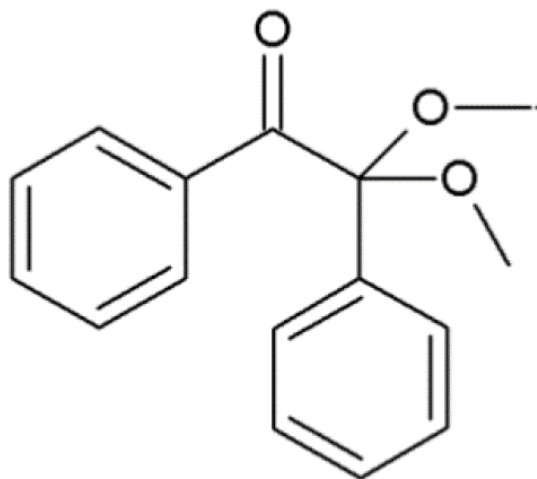

UV SPECTRUM

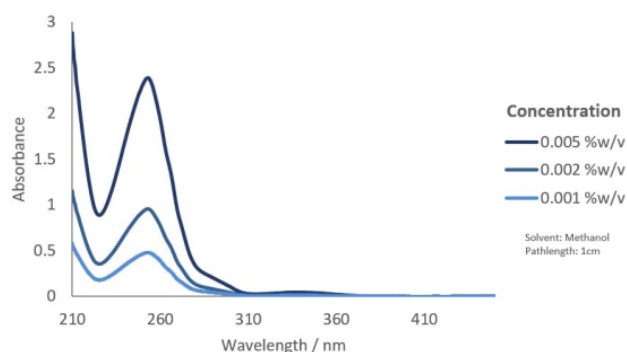

SHELF LIFE

Typical shelf-life is **24** months from the manufacture date for un-opened containers. In cases where product sampling is required to carry out incoming quality tests, shelf-life should be maintained beyond opening, provided that it is tightly closed immediately after and that contamination with foreign bodies is avoided.

STORAGE AND HANDLING

Store in the dark in the original, closed container, in a dry, cool (20-°C) and well-ventilated place.
Keep away from frost and heat (open flames, hot surfaces and sources of ignition) sources.

HEALTH AND SAFETY

See SDS for Health & Safety Considerations

SALES SPECIFICATIONS

Appearance	White to off-white crystalline powder
Purity (%)	≥ 99.0
Melting Range (°C)	64.0 - 69.0
Loss on Drying (%)	≤ 0.5

PERFORMANCE

Clear Coatings
Pigmented Systems
Surface Cure

SUGGESTED APPLICATIONS

3D printing
Adhesives & sealants
Composites
Flexographic inks
Industrial coatings
Offset inks
Screen inks

Headquarters: Arkema France
51, Esplanade du Général de Gaulle
92800 Puteaux – France
T +33 (0)1 49 00 80 80
www.Sartomer.arkema.com