
TECHNICAL DATA SHEET

SR454

Ethoxylated (3) Trimethylolpropane Triacrylate

DESCRIPTION

SR454 is a low skin irritation, fast curing monomer for use in free radical polymerization.

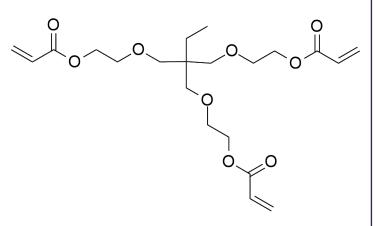

SHELF LIFE

Store in the original, closed container in a dry, cool (<45°C) and well-ventilated place. Keep away from frost and heat (open flames, hot surfaces and sources of ignition) sources. Typical shelf-life is 12 months from delivery date for unopened containers. In cases where product sampling is required to carry out incoming quality tests, shelf-life should be maintained beyond opening, provided that it is tightly closed immediately after and that contamination with foreign bodies is avoided. Inhibitors have been added to enhance storage stability. They require the presence of air in the container in order to improve their efficiency. Keep stabilizer levels constant to avoid explosive polymerization. An air space is required above the liquid in all containers

STORAGE

See SDS for Storage Considerations

HEALTH AND SAFETY

See SDS for Health & Safety Considerations

LIQUID PROPERTIES

Appearance Clear liquid
Functionality 3
Color (Pt/Co or APHA) <75
Density at 25°C (g/mL) 1.1062
Refractive Index at 25°C 1.4689
Viscosity at 25°C (mPa.s or cPs) 110
Molecular Weight (g/mol) 429
Surface Tension at 20°C (mN/m) 40

CURED PROPERTIES

Tg (°C), by DSC 103

PRODUCT PERFORMANCE

Pigment Wetting Flexibility Wood Adhesion Metal Adhesion PVC/PS Adhesion Stain Resistance Scratch Resistance Abrasion Resistance Chemical Resistance PE/PET/PP/PMMA Adhesion

Hardness

SUGGESTED APPLICATIONS

Adhesives & sealants Composites Conformal coatings Electronics Flexographic inks Inkjet inks Metal coatings Offset inks Overprint varnishes Polymer synthesis Screen inks Wood coatings

Arkema Inc 502 Thomas Jones Way Exton, PA 19341 – AMERICA www.Sartomer.arkema.com Headquarter: Arkema France 51, Esplanade du Général de Gaulle 92800 Puteaux – France T +33 (0)1 49 00 80 80 www.Sartomer.arkema.com

ARKEMA