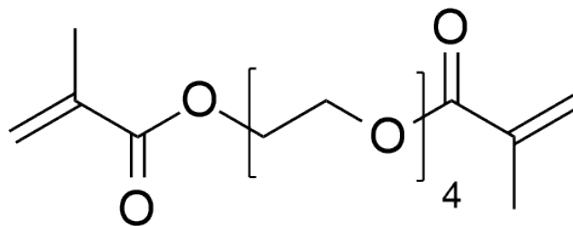


SR209

Tetraethylene Glycol Dimethacrylate

**Description**

SR209 is a low viscosity, non-corrosive, difunctional monomer with low vapor pressure and fast cure response for use in free radical polymerization.

Product performance

Flexibility
Corrosion Resistance
Moisture Resistance
Weatherability

Suggested applications

3D printing
Adhesives & sealants
Artificial marble
Composites
Conformal coatings
Electrical potting & encapsulation
Industrial flooring & waterproofing
Polymer synthesis
Rubber manufacturing
Wood coatings

Typical values

Appearance	Clear liquid
Color (Pt/Co or APHA)	<75
Density at 25°C (g/mL)	1.0802
Functionality	2
Molecular Weight (g/mol)	330
Refractive Index at 25°C	1.4587
Surface Tension at 20°C (mN/m)	38
Tg (°C), by DSC	-8
Viscosity at 25°C (mPa.s or cPs)	14

Shelf life

Store in the original, closed container in a dry, cool (<38°C) and well-ventilated place. Keep away from frost and heat (open flames, hot surfaces and sources of ignition) sources. Typical shelf-life is **6** months from delivery date for unopened containers. In cases where product sampling is required to carry out incoming quality tests, shelf-life should be maintained beyond opening, provided that it is tightly closed immediately after and that contamination with foreign bodies is avoided.

Inhibitors have been added to enhance storage stability. They require the presence of air in the container in order to improve their efficiency. Keep stabilizer levels constant to avoid explosive polymerization. An air space is required above the liquid in all containers; avoid storage under an oxygen-free atmosphere.

Storage

See SDS for Storage Considerations

Health and safety

See SDS for Health & Safety Considerations

Sartomer Americas
502 Thomas Jones Way
Exton, PA 19341 - AMERICA
Tel: (+1) 610.363.4100
Fax: (+1) 610.363.4140
Sartomer.com